

XIAMEN JOINT TECH. CO., LTD.

JOINT TECH, BORN FOR SUSTAINABLE ENERGY

🌐 <https://jointcharging.com>

✉ info@jointcharging.com

📍 No.98, South Dongfu Road, Haicang District, Xiamen, PRC

EVC12 / LEVEL2

UP TO 80A



DURABILITY

IP65 and IK08 protection ratings, allowing for indoors or outdoors.



POWERFUL

Up to 80A / 19.2kW of charging capacity.



CONNECTED

Complete with LAN connectivity (Wi-Fi or 4G optional), ensuring chargers are always online.



CONVENIENT

Adjust power as needed, 48A-16A.



OCPP

OCPP 1.6J help you connect EV charger to the cloud.



COMPATIBLE

SAE J1772 compliant, type 1 plug with 18ft cable.



Color:  

DATASHEET


Model No.	EVC12/16AC	EVC12/32AC	EVC12/40AC	EVC12/48AC	EVC12/70AC	EVC12/80AC
Voltage	208-240Vac					
Amperage/Power	16A/3.8KW	32A/7.6KW	40A/9.6KW	48A/11.5KW	70A/16.8KW	80A/19.2KW
AC Power Frequency	50-60Hz					
User Authentication	RFID ISO14443					
Connectivity	LAN / Wi-Fi standard, 4G optional					
	OCPP1.6J					
Operating Temperature	-22°F to 122°F					
IP Level	Nema 3					
IK Rating	IK08					
Cable Length	18ft (25ft optional)					
Net Weight	12.1lbs	12.1lbs	14.6lbs	15.7lbs	17.2lbs	17.2lbs
Gross Weight	14.6lbs	14.6lbs	17.0lbs	18.1lbs	19.6lbs	19.6lbs
Product Dimensions	14.2" x 9.8" x 3.9"					
Package Dimensions	19.6" x 13.7" x 9.3"				19.6" x 13.7" x 10.5"	

OCPP 1.6J

Connected successfully with 50+ global EVC platforms



DIMENSIONS

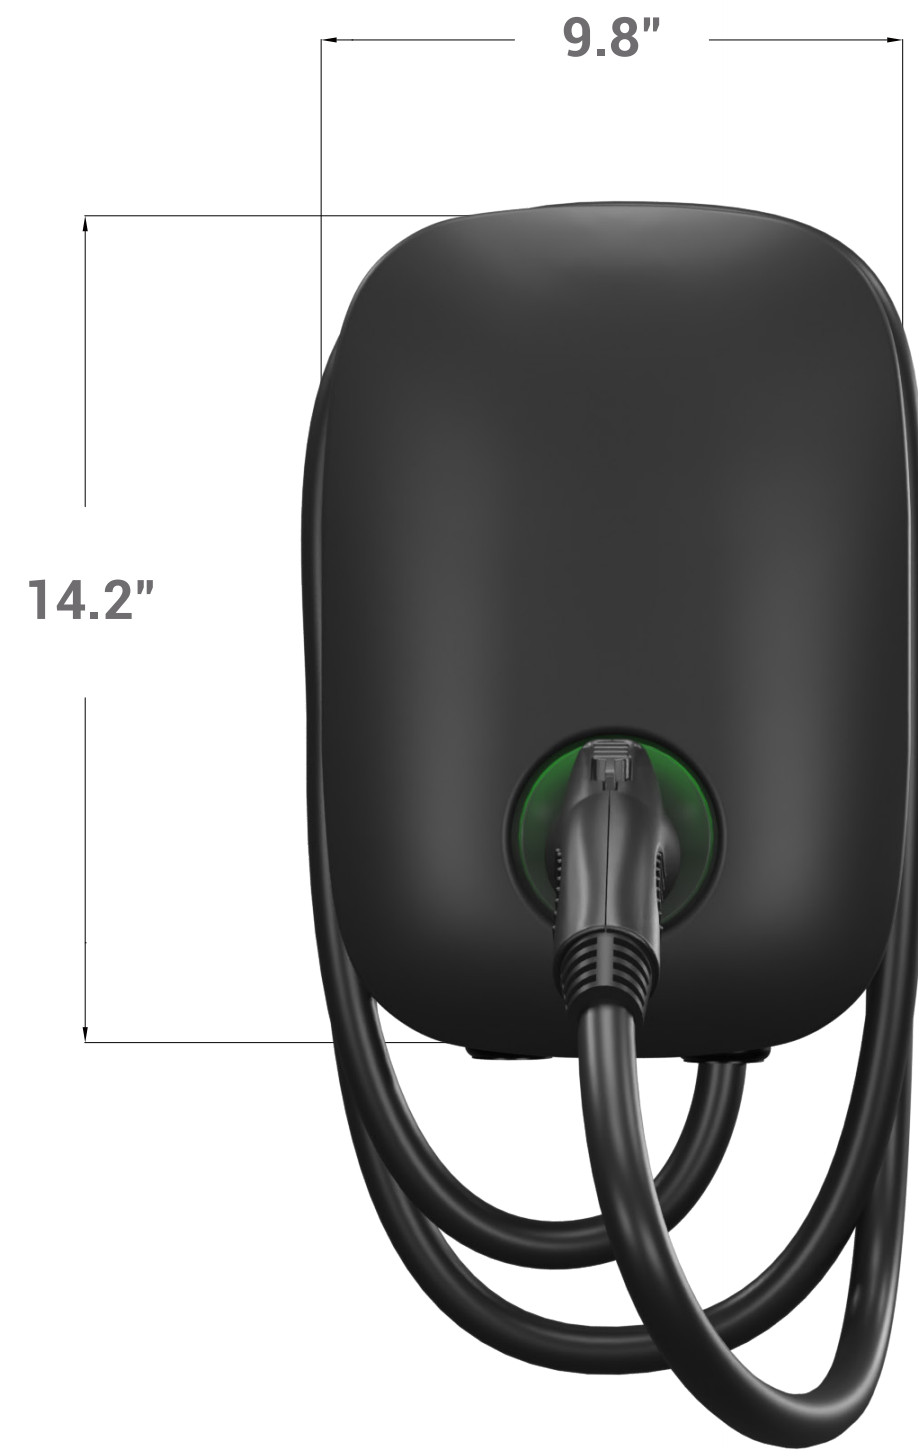

Package Dimensions
19.6" x 13.7" x 9.3"



Package Dimensions
19.6" x 13.7" x 10.5"